


01 Features

- Promote plant growth and increase yield by effectively irradiating important parts of the plant
- PPE up to 3.3 $\mu\text{mol}/\text{J}$, efficiently reducing energy costs
- Daisy chain and plug-and-play design, easy to install and low maintenance cost
- Bi-directional light distribution design, providing balanced light for surrounding plants simultaneously

02 Spec

SPECIFICATIONS	
AC Voltage (V)	200-240
Power Rating (W)	100W
PPF($\mu\text{mol}/\text{s}$)	330
Efficiency($\mu\text{mol}/\text{J}$)	3.3
Beam Angle	Bi-direction, 120°
Dimming Protocol	Non dim
IP Rating	IP54
Certifications	CETL(UL8800)/FCC
Warranty (years)	5
Lifetime(hrs)	36,000
Water Proof	IP66
Working Temp.	-10 to 40 °C
Size	2420* 68 mm
Weight	2.8 kg

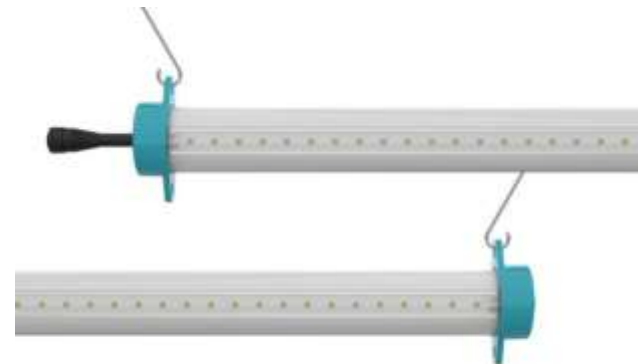

03 Application

